


# *EU Declaration of Conformity (EMC)*

Type of equipment:                   DVR CARD  
Model Name:                           GV2008  
Applicant/Manufacturer:           GeoVision Inc.

Address: 12FI., No. 316, Sec. 1, Neihu Rd., Neihu Chiu, Taipei,  
Taiwan 114, R.O.C

We hereby declare, that all major safety requirements, concerning to CE Mark Directive(93/68/EEC) and Low Voltage Directive(73/23/EEC), Electromagnetic Compatibility Directives(89/336/EEC,92/31/EEC) are fulfilled, as laid out in the guideline set down by the member states of the EEC Commission.

This declaration is valid for all samples that are part of this declaration, which are manufactured according to the production charts appendix.



The standards relevant for the evaluation of electrical safety requirements are as follows :

EMC : EN 55022: 1998+A1+A2:2003, EN 50130-4: 1995+A1+A2:2003  
EN 61000-3-2: 2000, EN 61000-3-3: 1995+A1:2001

**1. Certificate of conformity / Test report issued by :**

EMC : EMC Compliance Laboratory

Certificate No. : EMC-CE-0686

**2. Technical documentation kept at :**

**GeoVision Inc.**

*which will be made available upon request.*

**GeoVision Inc.**

*12FI., No. 316, Sec. 1, Neihu Rd., Neihu Chiu, Taipei,*

*Taiwan 114, R.O.C*

*December 30, 2005*

*(place and date of issue)*

*(name and signature of authorized person)*

# EMC TEST REPORT

Test report no.: EMC-CE-0686

Type of equipment: DVR CARD

Model Name: GV2008

Test Voltage: 230Vac, 50Hz

Applicant: GeoVision Inc.

Manufacturer: GeoVision Inc.

Test standards: EN 55022: 1998+A1+A2:2003 Class A  
EN 50130-4: 1995+A1+A2:2003  
EN 61000-3-2: 2000  
EN 61000-3-3: 1995+A1:2001

Testing Laboratory: EMC Compliance Ltd.

Test result: Complied

This product complies with the requirements of the EMC Directive 89/336/EEC. The results in this report apply only to the sample tested. This test report shall not be reproduced except in full, without the written approval of EMC compliance Laboratory.

**Date of test: 2005. 12. 23~28**    **Date of Issue: 2005. 12. 30**

Tested by: \_\_\_\_\_

KIM, DONG-MIN

Approved by: \_\_\_\_\_

CHUNG, MIN-SEOK

**EMC Compliance Ltd.**

82-1 JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO 449-825, KOREA

TEL: 82 31 336 9919    FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

# Contents

|   |    |
|---|----|
| 1. Client information.....                      | 3  |
| 2. Laboratory information.....                  | 4  |
| 3. Test system configuration.....               | 5  |
| 3.1 Operation environment.....                  | 5  |
| 3.2 Measurement Uncertainty.....                | 5  |
| 3.3 Sample calculation.....                     | 6  |
| 4. Description of E.U.T.....                    | 7  |
| 4.1 Product description.....                    | 7  |
| 4.2 Peripherals.....                            | 7  |
| 4.3 Used cables.....                            | 8  |
| 4.4 E.U.T. test configuration.....              | 8  |
| 4.5 Operating conditions.....                   | 8  |
| 5. Summary of test results.....                 | 9  |
| 5.1 Modification to the E.U.T.....              | 9  |
| 5.2 Standards & results.....                    | 9  |
| 5.3 Performance criteria.....                   | 10 |
| 6. Test results.....                            | 11 |
| 6.1 Conducted Emission.....                     | 11 |
| 6.2 Radiated Emission.....                      | 13 |
| 6.3 Electrostatic Discharge.....                | 15 |
| 6.4 Radio Frequency Electromagnetic Fields..... | 18 |
| 6.5 Electric Fast Transient/BURST.....          | 20 |
| 6.6 Surge.....                                  | 22 |
| 6.7 Conducted Immunity.....                     | 24 |
| 6.8 Dips and Interruptions.....                 | 26 |
| 6.9 Harmonics.....                              | 27 |
| 6.10 Flicker.....                               | 28 |
| 7. Test photographs.....                        | 29 |
| 8. E.U.T. photographs.....                      | 36 |
| 9. Appendix.....                                | 38 |

## 1. Client information

**Applicant:** GeoVision Inc.  
**Address:** 12FI., No. 316, Sec. 1, Neihu Rd., Neihu Chiu, Taipei,  
Taiwan 114, R.O.C  
**Telephone number:** + 886-2-8797-8377  
**Facsimile number:** + 886-2-8797-8335  
**Contact Person:** George Tai

**Manufacturer:** GeoVision Inc.  
**Address:** 12FI., No. 316, Sec. 1, Neihu Rd., Neihu Chiu, Taipei,  
Taiwan 114, R.O.C  
**Telephone number:** + 886-2-8797-8377  
**Facsimile number:** + 886-2-8797-8335  
**Contact Person:** George Tai

## 2. Laboratory information

### Address

EMC compliance Ltd.

82-1 JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO 449-825, KOREA

Telephone Number : 82 31 336 9919

Facsimile Number : 82 31 336 4767

FCC Filing No. : 793334

VCCI Registration No. : C-1713, R-1606

KOLAS NO.: 231

### SITE MAP



**EMC Compliance Ltd.**

82-1 JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO 449-825, KOREA

TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

### 3. Test system configuration

#### 3.1 Operation environment

|               | Temperature | Humidity | Pressure |
|---------------|-------------|----------|----------|
| OATS          | 15 °C       | 33 %     | 1010 hPa |
| Shielded room | 25 °C       | 37 %     | 1011 hPa |
| Immunity area | 22 °C       | 34 %     | 1019 hPa |

#### Test site

These testing items were performed following locations;

|               |  |
|---------------|--|
| Shielded Room | : Conducted Emission, ESD                            |
| OATS (10m)    | : Radiated Emission                                  |
| Immunity area | : RS, EFT/ Burst, SURGE, CS, Dip, Harmonics, Flicker |

#### 3.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability.

Based on NIS 80, 81, the measurement uncertainty level with a 95% confidence level was applied.

### 3.3 Sample calculation

#### Conducted Emission

The field strength is calculated by adding the LISN factor, cable loss from the measured reading.

The sample calculation is as follows :

$$FS = MR + LF + CL$$

MR = Meter Reading

LF = LISN Factor

CL = Cable Loss

If MR is 30dB, LISN Factor 2dB, CL 1dB

The result (MR) is

$$30 + 2 + 1 = 33\text{dBuV}$$

## 4. Description of E.U.T.

### 4.1 Product description

|                             |  |
|-----------------------------|--|
| Applicant/<br>Manufacturer: | GeoVision Inc.   |
| Address:                    | 12FI., No. 316, Sec. 1, Neihu Rd., Neihu Chiu, Taipei, Taiwan 114, R.O.C |
| Type of equipment:          | DVR CARD   |
| Basic Model:                | GV2008   |
| Serial number:              | N/A  |

### 4.2 Peripherals


| Description | Model / Part #      | Serial number    | Manufacture |
|-------------|---------------------|------------------|-------------|
| Main Board  | P4P 800             | 3AMM5L1054       | ASUS        |
| Power       | ATX-250-12Z         | 134300B404002709 | Bestec      |
| HDD         | Barracuta7200       | 5LT11C62         | Seagate     |
| Monitor     | 52S-S               | N379HVEY216557V  | SAMSUNG     |
| Printer     | EPSON STYLUS<br>C60 | DR5K014977       | EPSON       |
| Keyboard    | SEM-DT35            | 51024367         | SAMSUNG     |
| Mouse       | M071KC              | 501039656        | DELL        |
| Mouse       | M056UO              | 504050893        | DELL        |
| CCD Camera  | SOC-4020            | N/A              | SAMSUNG     |



### 4.3 Used cables

| Start |               | END        |             | Cable Spec. |          |
|-------|---------------|------------|-------------|-------------|----------|
| Name  | I/O Port      | Name       | I/O Port    | Length      | Shield   |
| EUT   | AV cable#1    | OPEN       | -           | 3.0         | Shielded |
|       | BNC cable#1   | CCD Camera | BNC cable#1 | 3.0         | Shielded |
|       | AV cable#2~8  | OPEN       | -           | 1.5         | Shielded |
|       | BNC cable#2~8 | OPEN       | -           | 1.5         | Shielded |
|       | AV cable(EXT) | OPEN       | -           | 1.5         | Shielded |

### 4.4 E.U.T. test configuration

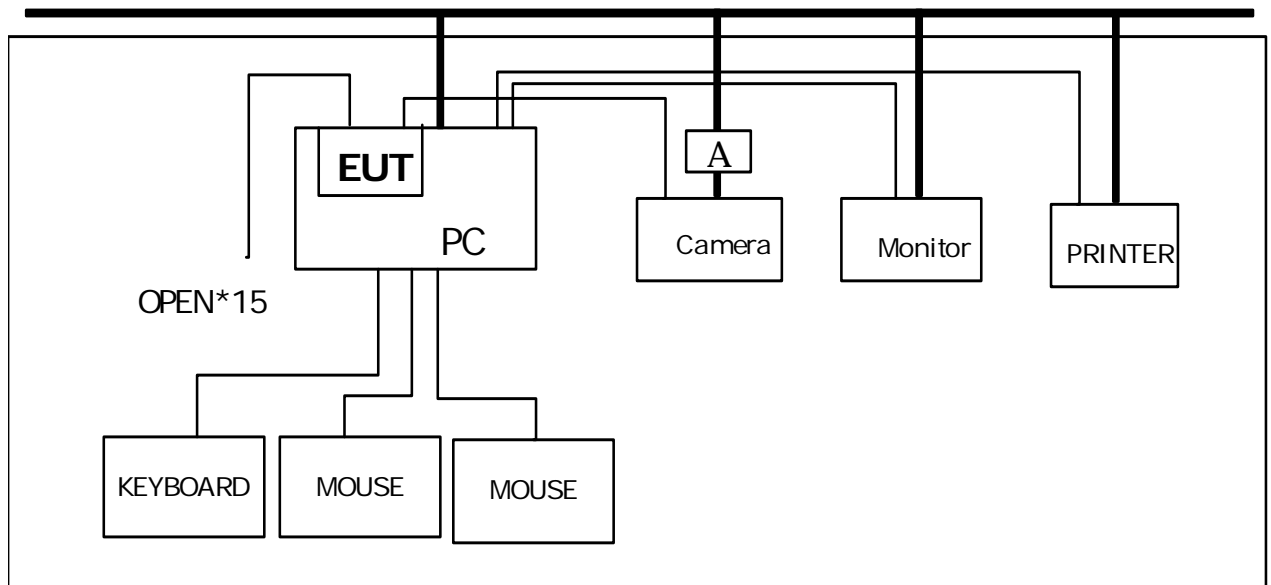

### 4.5 Operating conditions

-Real video capture mode.

## 5. Summary of test results

### 5.1 Modification to the E.U.T.

None

### 5.2 Standards & results

The following standards have been applied:

#### EN 55022 :1998+A1+A2:2003

*Information technology equipment – Radio disturbance characteristics - Limits and methods of measurement*

| Test items         | Result |
|--------------------|--------|
| Conducted emission | Pass   |
| Radiated emission  | Pass   |

#### EN 50130-4:1995+A1+A2:2003

*Alarm systems – part 4: Electromagnetic compatibility – Product Family standard: Immunity requirements for components of fire, intruder and social alarm systems*

| Test items               | Test methods       | Result |
|--------------------------|--------------------|--------|
| Electrostatic discharge  | EN 61000-4-2:1995  | Pass   |
| Electromagnetic field    | EN 61000-4-3:1995  | Pass   |
| Electric fast transients | EN 61000-4-4:1995  | Pass   |
| Surge                    | EN 61000-4-5:1995  | Pass   |
| Conducted immunity       | EN 61000-4-6:1996  | Pass   |
| Voltage dip/interruption | EN 61000-4-11:1994 | Pass   |

#### EN 61000-3-2: 2000

*Electromagnetic compatibility (EMC) – Part 3-2: Limits – Limits for harmonic-current emissions (equipment input current up to including 16A per phase)*

| Test items | Test method        | Result |
|------------|--------------------|--------|
| Harmonics  | EN 61000-3-2: 2000 | Pass   |

#### EMC Compliance Ltd.

82-1 JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO 449-825, KOREA

TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

EN 61000-3-3: 1995+A1 : 2001

*Electromagnetic compatibility (EMC) – Part 3-3: Limits – Limitation of voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current  $\leq 16A$  per phase and not subject to conditional connection*

| Test items | Test method                  | Result |
|------------|------------------------------|--------|
| Flicker    | EN 61000-3-3: 1995+A1 : 2001 | Pass   |

### 5.3 Performance criteria

**Performance criterion A:** The apparatus shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. If the minimum performance level may be replaced by a permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation, and from the apparatus if used as intended.

**Performance criterion B:** The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed.

If the minimum performance level or the permissible performance loss is not specified by the manufacturer then either of these may be derived from the product description and documentation from the apparatus if used as intended.

**Performance criterion C:** *Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operating of the controls.*

**EMC Compliance Ltd.**

82-1 JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO 449-825, KOREA

TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

## 6. Test results

### 6.1 Conducted Emission

#### 6.1.1 Measurement procedure

##### Mains

The measurements were performed in a shielded room.

EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane.

The rear of table was located 0.4 m to the vertical conducted plane.

Each EUT power lead, except ground (safety) lead, was individually connected through a LISN to input power source.

Both lines of power cord, hot and neutral, were measured.

#### 6.1.2 Used equipments

| Equipment     | Model       | Serial No. | Makers | Next Cal. Date | Used                                |
|---------------|-------------|------------|--------|----------------|-------------------------------------|
| Test receiver | ESHS10      | 843276/003 | R&S    | 06.05.13       | <input checked="" type="checkbox"/> |
| L.I.S.N.      | ESH3-Z5     | 100267     | R&S    | 06.06.17       | <input checked="" type="checkbox"/> |
|               | L2-16A      | 0000J10705 | PMM    | 06.11.30       | <input checked="" type="checkbox"/> |
| Test site     | Shield room | -          | -      | -              | <input checked="" type="checkbox"/> |

#### 6.1.3 Measurement uncertainty

Conducted emission measurement : (k=2, 95%)

9kHz-150 kHz : ±3.47 [dB]

150kHz-300 MHz : ±3.01 [dB]

#### 6.1.4 Test data

| Frequency<br>[MHz] | Correction<br>Factor |       | Line | Quasi-peak |         |        | Average |         |        |
|--------------------|----------------------|-------|------|------------|---------|--------|---------|---------|--------|
|                    | LISN                 | Cable |      | Limit      | Reading | Result | Limit   | Reading | Result |
|                    |                      |       |      | [dBuV]     | [dBuV]  | [dBuV] | [dBuV]  | [dBuV]  | [dBuV] |
| 0.174              | 0.28                 | 0.2   | N    | 79.00      | 60.94   | 61.42  | 66.00   | 51.68   | 52.16  |
| 0.201              | 0.12                 | 0.1   | N    |            | 48.24   | 48.46  |         | 41.88   | 42.10  |
| 0.231              | 0.12                 | 0.1   | N    |            | 49.85   | 50.07  |         | 41.88   | 42.10  |
| 0.288              | 0.12                 | 0.1   | H    |            | 46.95   | 47.17  |         | 38.37   | 38.59  |
| 0.345              | 0.13                 | 0.1   | N    |            | 44.75   | 44.98  |         | 35.77   | 36.00  |
| 0.576              | 0.16                 | 0.1   | N    | 73.00      | 40.04   | 40.30  | 60.00   | 32.69   | 32.95  |
| 0.693              | 0.16                 | 0.1   | N    |            | 39.69   | 39.95  |         | 32.86   | 33.12  |
| 0.750              | 0.15                 | 0.1   | H    |            | 38.55   | 38.80  |         | 30.31   | 30.56  |
| 16.230             | 0.69                 | 0.2   | H    |            | 35.83   | 36.72  |         | 29.80   | 30.69  |
| 18.240             | 0.75                 | 0.2   | N    |            | 38.91   | 39.86  |         | 33.01   | 33.96  |

- Note. QP = Quasi-Peak, AV= Average
- Loss = LISN Loss + Cable Loss
- Measurement time : 1 s

#### 6.1.5 Result

Minimum limit margin is 13.84 dB at 0.174 MHz.

## 6.2 Radiated Emission

### 6.2.1 Measurement procedure

A pretest was performed at 3 m distance in a mini chamber for searching correct frequency.

The final test was done at a 10 m open area test site with a quasi-peak detector.

EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane.

They were folded back and forth forming a bundle 0.3 m to 0.4 m long and were hanged at a 0.4 m height to the ground plane.

Cables connected to EUT were fixed to cause maximum emission.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization.

The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

### 6.2.2 Used equipments

| Equipment             | Model no. | Serial no. | Makers         | Next cal. date | Used                                |
|-----------------------|-----------|------------|----------------|----------------|-------------------------------------|
| Test receiver         | EVSD      | 827864/006 | R&S            | 06.05.14       | <input checked="" type="checkbox"/> |
| TRILOG Broadband Ant. | VULB 9160 | 9160-3149  | SCHWARZBECK    | 06.10.10       | <input checked="" type="checkbox"/> |
| Antenna Mast          | A109      | N/A        | DEAIL          | -              | <input checked="" type="checkbox"/> |
| Turn Table            | TS14      | N/A        | DEAIL          | -              | <input checked="" type="checkbox"/> |
| 10m OATS              | -         | -          | EMC Compliance | -              | <input checked="" type="checkbox"/> |

### 6.2.3 Measurement uncertainty

Radiated Emission measurement : (k=2, 95%)

30-300 MHz ; 3 m: ±3.69 [dB], 10 m: ±3.67 [dB]

300-1000 MHz ; 3 m: ±4.07 [dB], 10 m: ±3.41 [dB]

**EMC Compliance Ltd.**

82-1 JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO 449-825, KOREA

TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

## 6.2.4 Test data

| Frequency<br>[MHz] | Reading<br>[dBuV/m] | Pol. | Height<br>[m] | angle | Correction<br>Factor |       | Limits<br>[dBuV/m] | Result<br>[dBuV/m] | Margin<br>[dB] |
|--------------------|---------------------|------|---------------|-------|----------------------|-------|--------------------|--------------------|----------------|
|                    |                     |      |               |       | Antenna              | Cable |                    |                    |                |
| 80.94              | 13.6                | H    | 4.0           | 271   | 7.76                 | 1.20  | 40.0               | 22.56              | 17.44          |
| 134.28             | 12.7                | V    | 1.0           | 334   | 12.20                | 1.80  | 40.0               | 26.70              | 13.30          |
| 225.20             | 14.1                | H    | 4.0           | 119   | 10.20                | 2.50  | 40.0               | 26.80              | 13.20          |
| 350.10             | 16.2                | H    | 1.8           | 28    | 13.97                | 3.40  | 47.0               | 33.57              | 13.43          |
| 450.00             | 14.0                | H    | 2.4           | 124   | 16.54                | 4.00  | 47.0               | 34.54              | 12.46          |
| 600.00             | 10.3                | V    | 2.4           | 195   | 19.56                | 5.20  | 47.0               | 35.06              | 11.94          |
| 675.40             | 9.9                 | V    | 2.1           | 220   | 20.35                | 5.60  | 47.0               | 35.85              | 11.15          |
| 702.06             | 4.6                 | H    | 1.2           | 173   | 20.71                | 5.90  | 47.0               | 31.19              | 15.81          |
| 750.00             | 9.6                 | H    | 1.5           | 152   | 21.99                | 6.30  | 47.0               | 37.89              | 9.11           |
| 800.15             | 7.0                 | V    | 1.5           | 227   | 22.04                | 6.60  | 47.0               | 35.64              | 11.36          |
| 972.04             | 7.8                 | H    | 1.0           | 178   | 23.96                | 7.70  | 47.0               | 39.46              | 7.54           |

\* Receiving Antenna Mode : *Horizontal, Vertical*

\* 10 m OATS

\* Note : Reading = Test Receiver meter, P= Polarization → POL H = Horizontal,  
POL V = Vertical

\* Result = Field Strength (Antenna factor + Cable factor + Reading)

## 6.2.5 Result

Minimum limit margin is 7.54 dB at 972.04 MHz.

## 6.3 Electrostatic Discharge

### 6.3.1 Measurement procedure

A ground reference plane was located on the floor, and connected to earth via a low impedance connection.

The return cable of the ESD generator was connected to the reference plane. In case of floor standing equipment, EUT was placed on the reference plane on 0.1 m of insulating Support.

In case of table top equipment, EUT was placed on a wooden table 0.8m above the reference grounded floor.

A horizontal coupling plane(HCP) was placed on the table, and Connected to the reference plane via a 470 resistor located in each end (0.5mm insulating support between EUT and HCP).

In both cases a vertical coupling plane(VCP) OF 0.5 X 0.5m was located 10cm from the EUT's sides.

The VCP was connected to the reference plane in the same matter as the HCP.

### 6.3.2 Used equipments

| Equipment  | Model No. | Serial No. | Makers  | Next Cal. Date | Used                                |
|------------|-----------|------------|---------|----------------|-------------------------------------|
| ESD Tester | PESD 1600 | H011 309   | HAEFELY | 2006.08.12     | <input checked="" type="checkbox"/> |
| HCP        | -         | -          | -       | -              | <input checked="" type="checkbox"/> |
| VCP        | -         | -          | -       | -              | <input checked="" type="checkbox"/> |



### 6.3.3 Test Data

#### Test Specifications

Test Specification : EN61000-4-2

#### Kind of Discharges

- Contact Discharge
- Air Discharge
- HCP
- VCP

#### Discharge Voltages

- Contact Discharge :  $\pm 2, 4, 6\text{kV}$
- Air Discharge :

#### Discharge Impedance

- 330  $\Omega/150$        2K $\Omega/330$

#### Number Of Discharge

- Number of discharges per point, for each voltage and polarity  
: 10 (Interval between discharges :  $\geq 1\text{s}$ )

Test point ( Please refer to attached photograph. )

- Contact Discharge : BNC Connector Port, AV Connector Port, AV(ext) Port, Board Bracket
- Air Discharge : No air discharge part



#### Test Results

- Complied       Not complied

Comment :

-There was no change of operation status during above testing.

Electrostatic Discharge (Test Point)

Air discharge   
Contact discharge 



## 6.4 Radio Frequency Electromagnetic Fields

### 6.4.1 Measurement procedure

The test was performed at 3m full anechoic chamber.

For floor standing equipment, the EUT was standing on the floor.

For tabletop equipment, the EUT was located on a wooden table 0.8m above the floor.

The EUT was tested all sides, horizontal and vertical polarization.

The field uniformity was calibrated for 1V/m, 3V/m, 10V/m.

### 6.4.2 Used equipments

| Equipment                   | Model no.  | Serial no.  | Makers | Next Cal. date | Used                                |
|-----------------------------|------------|-------------|--------|----------------|-------------------------------------|
| Power meter                 | PM2002     | 302852      | AR     | 06.05.03       | <input checked="" type="checkbox"/> |
| Field monitor               | FM5004     | 303078      | AR     | 07.12.08       | <input checked="" type="checkbox"/> |
| Power sensor (with adapter) | PH2000     | 303224      | AR     | 06.05.03       | <input checked="" type="checkbox"/> |
| Power sensor (with adapter) | PH2000     | 303222      | AR     | 06.05.03       | <input checked="" type="checkbox"/> |
| Isotropic probe             | FP5000     | 303057      | AR     | 07.12.08       | <input checked="" type="checkbox"/> |
| Directional coupler         | DC6180     | 303976      | AR     | 06.05.03       | <input checked="" type="checkbox"/> |
| Amplifier                   | 150W1000M2 | 303843      | AR     | 06.05.03       | <input checked="" type="checkbox"/> |
| Signal generator            | 2023A      | 202304/2578 | IFR    | 06.05.03       | <input checked="" type="checkbox"/> |
| Function generator          | 33120A     | US36018826  | HP     | 07.05.03       | <input checked="" type="checkbox"/> |
| BiconiLog Ant.              | 3142B      | 1786        | EMCO   | 06.05.15       | <input checked="" type="checkbox"/> |

### 6.4.3 Measurement uncertainty

Radio Frequency Electromagnetic Fields :  $\pm 1.89$  [dB] (k=2, 95%)

#### 6.4.4 Test Data

##### Test Specifications

Test Specification : EN 61000-4-3

##### Frequency Range

80MHz - 1000MHz     900 MHz  $\pm$  5MHz     26MHz - 500MHz

##### Test level

1V/m                       3V/m                       10V/m

##### Modulation

AM : 1kHz, 80%  
 PM : 1Hz (0.5s ON: 0.5 s OFF)

##### Frequency step

log 1% step                       log 3% step                       log 5% step

##### Dwell Time

3 s                                       2 s                                       1 s

##### Test point

Front  
 Rear  
 Left  
 Right

##### Test Results

Complied                                       Not complied

##### Comment :

-There was no change of operation status during above testing.

## 6.5 Electric Fast Transient/BURST

### 6.5.1 Measurement procedure

A ground reference plane was located on the floor.

EFT generator was connected to reference ground plane via low impedance connection.

For floor standing equipment, EUT was placed on a 0.1 m wooden table.

For tabletop equipment, EUT was placed on a wooden table(0.8m) above the reference plane.

### 6.5.2 Used equipments

| Equipment                 | Model No.  | Serial No. | Makers  | Next Cal. date | Used                                |
|---------------------------|------------|------------|---------|----------------|-------------------------------------|
| EFT/B Tester              | UCS 500 M6 | 0701-03    | EM TEST | 06.05.03       | <input checked="" type="checkbox"/> |
|                           | RWG500 M6  | 0701-08    | EM TEST | 06.05.08       | <input type="checkbox"/>            |
|                           | TSS500 M4  | 0402-01    | EM TEST | 06.05.03       | <input type="checkbox"/>            |
| Capacitive coupling clamp | N/A        | N/A        | EM TEST | -              | <input checked="" type="checkbox"/> |

### 6.5.3 Test Data

#### Test Specifications

Test Specification : EN 61000-4-4

#### Coupling

Power             Signal Lines             Telecommunication line

#### Test level

AC Power    :  $\pm 0.5$  kV &  $\pm 1$  kV &  $\pm 2$  kV

Signal Line :  $\pm 0.25$  kV &  $\pm 0.5$  kV &  $\pm 1$  kV

Tel. line     :

#### Test mode

- AC Power     : L1, L2, PE, L1-L2, L1-PE, L2-PE, L1-L2-PE

- Signal lines : BNC cable, AV cable

Burst frequency : 5 kHz, 5/50 ns

Coupling Time    :     120 s

#### Test Results

Complied                             Not complied

#### Comment :

-There was no change of operation status during above testing.(Power)

-During the test ( $\pm 1$ kV), dot was appeared. After this test, EUT was operated normally.(Signal line)

## 6.6 Surge

### 6.6.1 Measurement procedure

A ground reference plane was located on the floor.

SURGE generator was connected to reference ground plane via low impedance connection.

For floor standing equipment, EUT was placed on a 0.1 m wooden table.

For tabletop equipment, EUT was placed on a wooden table(0.8m) above the reference plane.

### 6.6.2 Used equipments

| Equipment       | Model No.  | Serial No. | Makers  | Next Cal. date | Used                                |
|-----------------|------------|------------|---------|----------------|-------------------------------------|
| Surge Generator | UCS 500 M6 | 0701-03    | EM TEST | 06.05.03       | <input checked="" type="checkbox"/> |
|                 | RWG500 M6  | 0701-08    | EM TEST | 06.05.08       | <input type="checkbox"/>            |
|                 | TSS500 M4  | 0402-01    | EM TEST | 06.05.03       | <input type="checkbox"/>            |
| Coupling Clamp  | CNV 508    | 1001-10    | EM TEST | 06.05.16       | <input checked="" type="checkbox"/> |

### 6.6.3 Test Data

#### Test Specifications

Test Specification : EN 61000-4-5

#### Coupling

Power                   Signal Line                   Telecommunication line

#### Test level

Power                  :  $\pm 0.5 \text{ kV} \ \& \ \pm 1 \text{ kV} \ \pm 2 \text{ kV}$

Signal Line :  $\pm 0.5 \text{ kV} \ \& \ \pm 1 \text{ kV}$

Tel. line                  :

#### Test mode

- AC Power                  : L-N, L-PE, N-PE

- Signal Line                : BNC cable, AV cable

#### Coupling Impedance

$40\Omega+0.5$                     $40\Omega$                     $10\Omega+9$                    18

Coupling Time              :     5 s

Number of Surge            :     5

#### Test Results

Complied                                   Not complied

#### Comment :

-There was no change of operation status during above testing.



## 6.7 Conducted Immunity

### 6.7.1 Measurement procedure

A ground reference plane was located on the floor.

For tabletop equipment, the test was performed on a ground reference plane on a 0.8m wooden table.

The EUT was isolated 0.1 m isolating support.

The ground plane was connected to floor reference ground plane via low impedance connection.

For floor standing equipment, EUT was placed on a 0.1 m wooden table.

This test were Performed using CDN for mains, clamp for signal. and injection probe.

### 6.7.2 Used equipments

| Equipment    | Model no. | Serial no. | Makers    | Next Cal. date | Used                                |
|--------------|-----------|------------|-----------|----------------|-------------------------------------|
| CS Generator | NSG 2070  | 1054       | Schaffner | 06.05.03       | <input checked="" type="checkbox"/> |
| CDN          | M016      | 16674      | Schaffner | 06.04.08       | <input checked="" type="checkbox"/> |
| EM Clamp     | KEMZ 801  | 17643      | Schaffner | -              | <input checked="" type="checkbox"/> |

### 6.7.3 Test Data

#### Test Specifications

Test Specification : EN 61000-4-6

#### Frequency Range

150 kHz - 100MHz       150 kHz - 230MHz       150 kHz - 500MHz

Test point: Power, BNC cable, AV cable

#### Coupling

Power : CDN  
 Signal : Clamp  
 Tel. line :

#### Test level

1V       3V       10V

#### Modulation

AM : 1kHz, 80%  
 PM : 1Hz (0.5 s ON : 0.5 s OFF)

#### Frequency step

log 1% step       log 3% step       log 5% step

#### Dwell Time

3 s       2 s       1 s

#### Test Results

Complied       Not complied

#### Comment :

-There was no change of operation status during above testing.

## 6.8 Dips and Interruptions

### 6.8.1 Measurement procedure

The dips/interruption test is only applicable to AC mains.

The dips/interruptions were applied at zero crossing.

### 6.8.2 Used equipments

| Equipment                | Model no.  | Serial no. | Makers  | Next Cal. date | Used                                |
|--------------------------|------------|------------|---------|----------------|-------------------------------------|
| dips/interruption Tester | UCS 500 M6 | 0701-03    | EM TEST | 06.05.03       | <input checked="" type="checkbox"/> |
|                          | RWG500 M6  | 0701-08    | EM TEST | 06.05.08       | <input type="checkbox"/>            |
|                          | TSS500 M4  | 0402-01    | EM TEST | 06.05.03       | <input type="checkbox"/>            |

### 6.8.3 Test data

Test specification : EN 61000-4-11

#### Test data

| Test Level (%UT) | Dip/Int. (%UT) | Duration /Period     | Phase (°) | Count number | Result |
|------------------|----------------|----------------------|-----------|--------------|--------|
| 0 %              | 100 %          | 0.5/1/5<br>Period    | 0         | 3T           | Pass   |
| 40 %             | 60 %           | 0.5/1/5/10<br>Period | 0         | 3T           | Pass   |

#### Test results

Complied

Not complied

#### Comment :

-There was no change of operation status during above testing.

## 6.9 Harmonics

### 6.9.1 Measurement procedure

The equipment is supplied in series with shunt(s) Rm or current transformer(s) from a source having the same nominal voltage and frequency as the rated supply voltage and frequency of the equipment. Measurements shall be made under normal load, or conditions for adequate heat discharge, and under normal operating conditions. User's operation controls or automatic programmers shall be set to produce the maximum harmonic component, for each successive harmonic component in turn. For the purpose of harmonic current limitation, equipment is classified as follows :

Class A : Equipment not specified in one of the three other Classes shall be considered as Class A equipment.

- Balanced three-phase equipment;
- Household appliances excluding equipment identified as Class D;
- Tools excluding portable tools;
- Dimmers for incandescent lamps;
- Audio equipment.

Class B : Portable tools; Arc welding equipment which is not professional equipment.

Class C : Lighting equipment.

Class D : Equipment having a specified power according to 6.2.2 less than or equal to 600 w, of the following types:

- Personal computers and personal computer monitors;
- Television receivers.

### 6.9.2 Used equipments

| Equipment               | Model no.         | Serial no. | Makers | Next Cal. date | Used                                |
|-------------------------|-------------------|------------|--------|----------------|-------------------------------------|
| Harmonics/Flicker meter | 5001x-CTS-400-413 | 54984      | C.I.   | 06.05.03       | <input checked="" type="checkbox"/> |
| Test site               | Immunity area     | -          | -      | -              | <input checked="" type="checkbox"/> |

### 6.9.3 Test data

- Refer to attached test data

#### Test results

Complied  Not complied

#### EMC Compliance Ltd.

82-1 JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO 449-825, KOREA

TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

## 6.10 Flicker

### 6.10.1 Measurement procedure

EUT was connected to the power analyzer system.

Measurement was performed to obtain the desired flicker parameters.

The measuring time depends on which parameters are to be measured.

$$P_{It} = 2 \text{ h}$$

$$P_{st} = 10 \text{ min}$$

Controls and automatic programs shall be set to produce the most unfavorable sequence of voltage changes, using only those combinations of controls and programs are mentioned by the manufacturer in the instruction manual.

### 6.10.2 Used equipments

| Equipment               | Model no.         | Serial no. | Makers | Next Cal. date | Used                                |
|-------------------------|-------------------|------------|--------|----------------|-------------------------------------|
| Harmonics/Flicker meter | 5001x-CTS-400-413 | 54984      | C.I.   | 06.05.03       | <input checked="" type="checkbox"/> |
| Test site               | Immunity area     | -          | -      | -              | <input checked="" type="checkbox"/> |

### 6.10.3 Test data

- Refer to attached test data

#### Test results

Complied

Not complied

## 7. Test photographs

### Conducted emission



Radiated Emission






Electrostatic Discharge



Radio Frequency Electromagnetic Fields

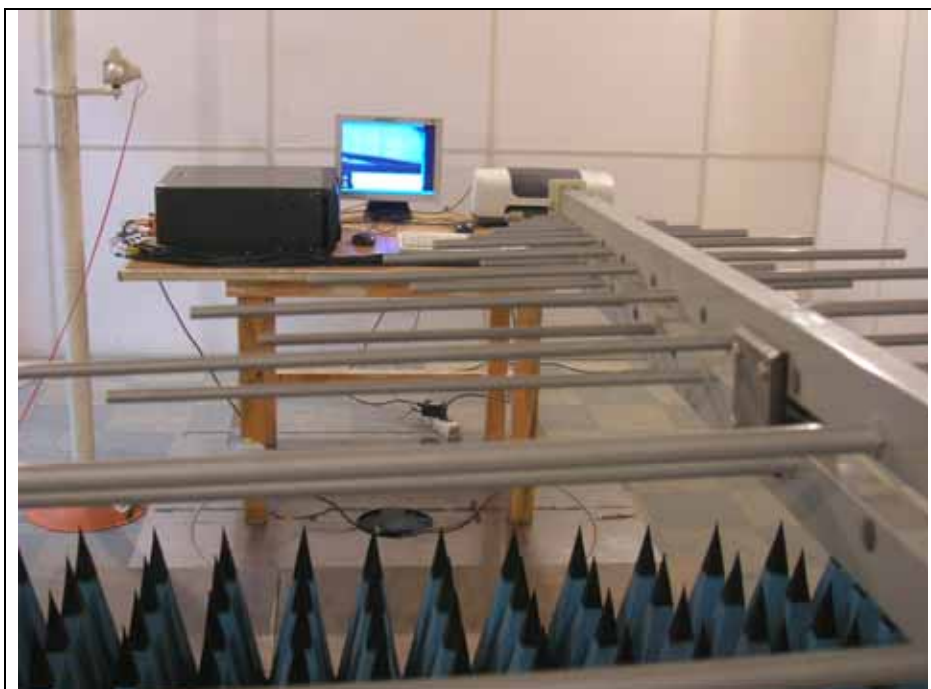

**EMC Compliance Ltd.**

82-1 JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO 449-825, KOREA

TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.



Electric Fast Transient



Surge



Conducted Immunity





Dip/Interruptions



Harmonics/Flicker



**EMC Compliance Ltd.**

82-1 JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO 449-825, KOREA

TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

## 8. E.U.T. photographs

### Front View



### Rear View



**EMC Compliance Ltd.**

82-1 JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO 449-825, KOREA

TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

Inside



Cable



**EMC Compliance Ltd.**

82-1 JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO 449-825, KOREA

TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

## 9. Appendix

### Conducted Emission test graph


EUT: GV2008  
 Manuf: GEOVISION  
 Op Cond: H  
 Operator:  
 Test Spec: EN55022 Class A Conducted Emission  
 Comment:

Result File: 0512080h.dat : GEOVISION\_DVRBOARD\_GV2008\_H

Scan Settings (2 Ranges)

| Frequencies |       |       |       | Receiver Settings |        |       |        |       |
|-------------|-------|-------|-------|-------------------|--------|-------|--------|-------|
| Start       | Stop  | Step  | IF BW | Detector          | M-Time | Atten | Preamp | OpRge |
| 150kHz      | 3MHz  | 3kHz  | 10kHz | PK+AV             | 10msec | Auto  | OFF    | 60dB  |
| 3MHz        | 30MHz | 10kHz | 10kHz | PK+AV             | 5msec  | Auto  | OFF    | 60dB  |

Final Measurement: Detectors: X QP / + AV  
 Meas Time: 1sec  
 Peaks: 8  
 Acc Margin: 25 dB

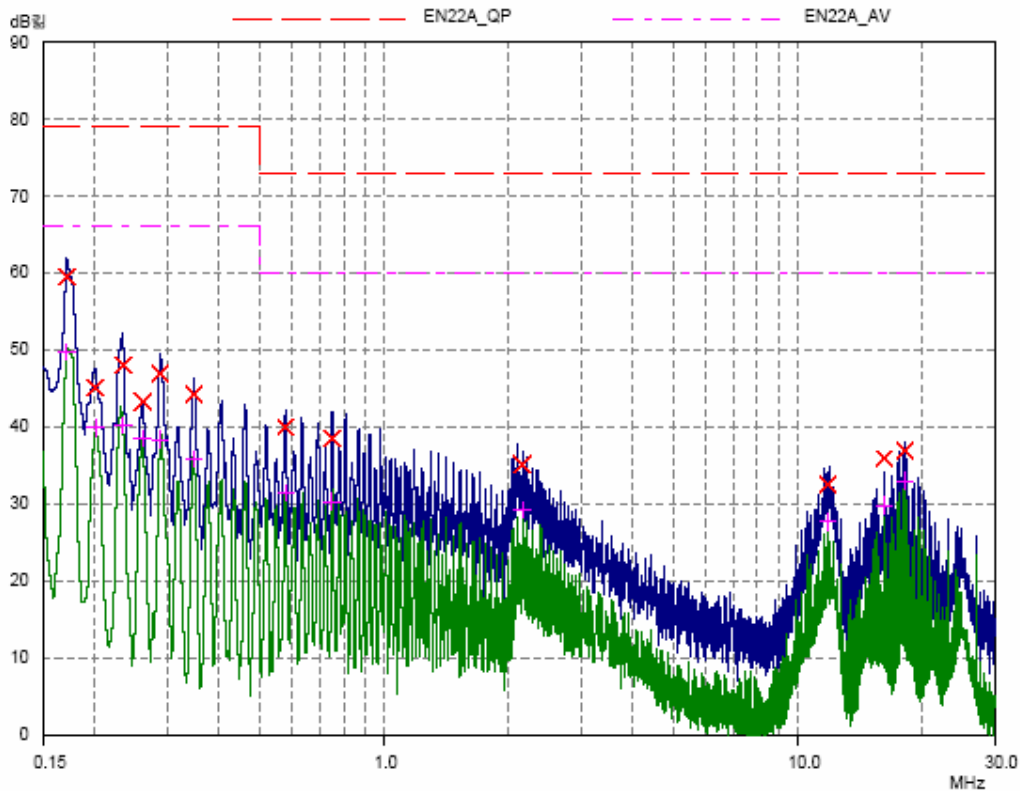




EUT: GV2008  
 Manuf: GEOVISION  
 Op Cond: N  
 Operator:  
 Test Spec: EN55022 Class A Conducted Emission  
 Comment:

Result File: 0512080n.dat : GEOVISION\_DVRBOARD\_GV2008\_N

Scan Settings (2 Ranges)

| Frequencies |       |       | Receiver Settings |          |        |       |        |       |  |
|-------------|-------|-------|-------------------|----------|--------|-------|--------|-------|--|
| Start       | Stop  | Step  | IF BW             | Detector | M-Time | Atten | Preamp | OpRge |  |
| 150kHz      | 3MHz  | 3kHz  | 10kHz             | PK+AV    | 10msec | Auto  | OFF    | 60dB  |  |
| 3MHz        | 30MHz | 10kHz | 10kHz             | PK+AV    | 5msec  | Auto  | OFF    | 60dB  |  |

Final Measurement: Detectors: X QP / + AV  
 Meas Time: 1sec  
 Peaks: 8  
 Acc Margin: 25 dB

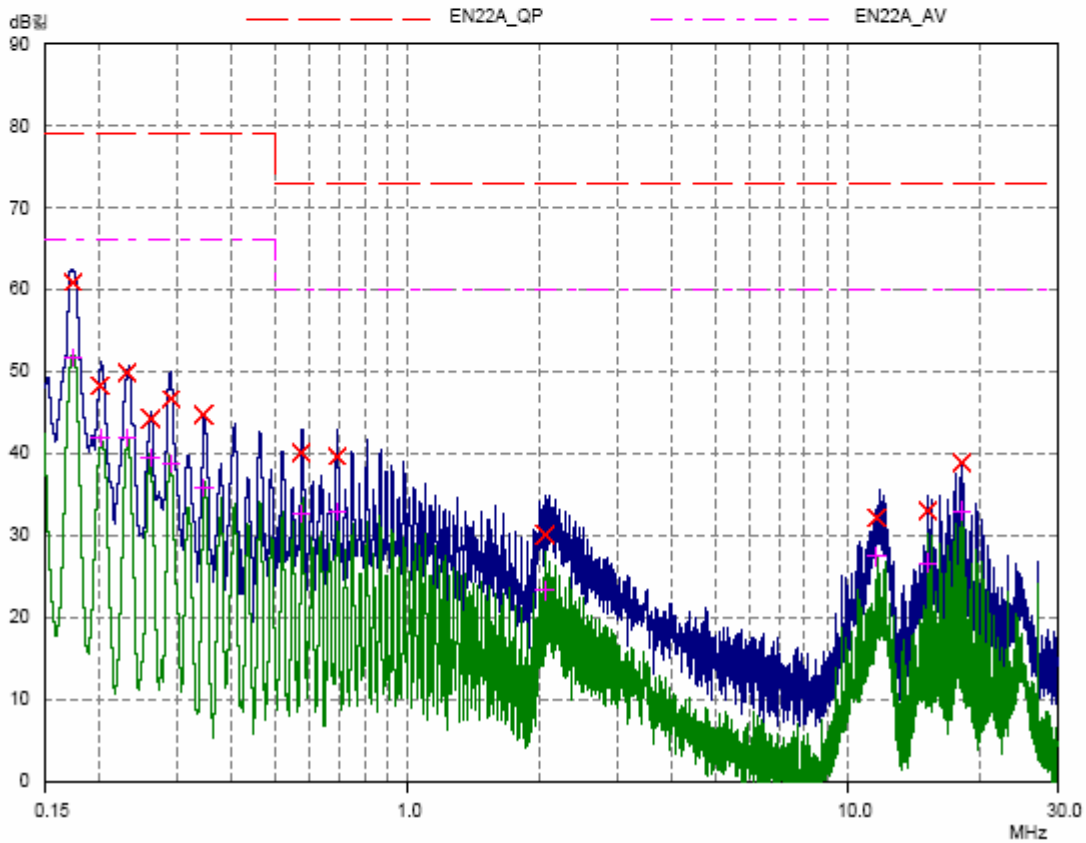



Harmonics test graph


Harmonics – Class-A per A-14(Run time)

|   |                                   |
|---|-----------------------------------|
| EUT: DVR BOARD_GV2008                             | Tested by:                        |
| Test category: Class-A per A-14 (European limits) | Test Margin: 100                  |
| Test date: 2005-12-28                             | Start time: 오후 2:46:03            |
| Test duration (min): 2.5                          | End time: 오후 2:48:43              |
| Comment:  | Data file name: H-000472.cts_data |
| Customer: UDP TECH                                |                                   |

Test Result: Fail


Source qualification: Normal

Current & voltage waveforms

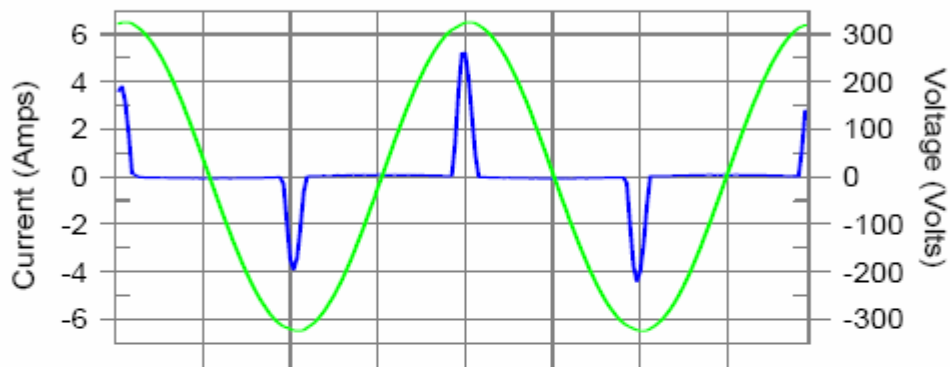

Harmonics and Class A limit line

European Limits

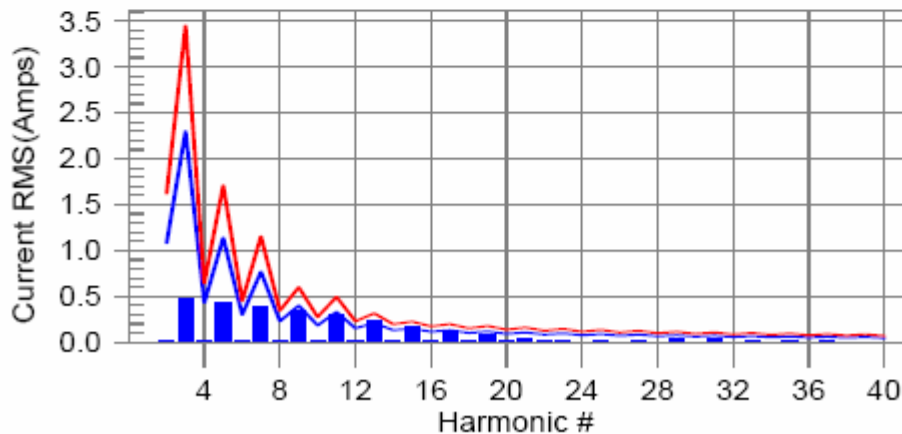

Test result: Fail Worst harmonic was #15 with 78.29% of the limit.

**EMC Compliance Ltd.**

82-1 JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO 449-825, KOREA

TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.



### Voltage Source Verification Data (Run time)

EUT: DVR BOARD\_2008  
 Test category: Class-A per A-14 (European limits)  
 Test date: 2005-12-28  
 Test duration (min): 2.5  
 Comment:  
 Customer: UDP TECH

Tested by:  
 Test Margin: 100  
 Start time: 오후 2:46:03  
 End time: 오후 2:48:43

Data file name: H-000472.cts\_data

Test Result: Fail

Source qualification: Normal

#### Highest parameter values during test:

|                        |                      |
|------------------------|----------------------|
| Voltage (Vrms): 229.56 | Frequency(Hz): 50.00 |
| I_Peak (Amps): 5.388   | I_RMS (Amps): 1.107  |
| I_Fund (Amps): 0.507   | Crest Factor: 5.212  |
| Power (Watts): 116     | Power Factor: 0.458  |

| Harm# | Harmonics V-rms | Limit V-rms | % of Limit | Status |
|-------|-----------------|-------------|------------|--------|
| 2     | 0.102           | 0.459       | 22.20      | OK     |
| 3     | 0.682           | 2.066       | 33.00      | OK     |
| 4     | 0.021           | 0.459       | 4.68       | OK     |
| 5     | 0.104           | 0.918       | 11.33      | OK     |
| 6     | 0.022           | 0.459       | 4.88       | OK     |
| 7     | 0.157           | 0.689       | 22.78      | OK     |
| 8     | 0.015           | 0.459       | 3.35       | OK     |
| 9     | 0.172           | 0.459       | 37.46      | OK     |
| 10    | 0.011           | 0.459       | 2.48       | OK     |
| 11    | 0.165           | 0.230       | 71.74      | OK     |
| 12    | 0.020           | 0.230       | 8.61       | OK     |
| 13    | 0.162           | 0.230       | 70.61      | OK     |
| 14    | 0.011           | 0.230       | 4.72       | OK     |
| 15    | 0.129           | 0.230       | 56.25      | OK     |
| 16    | 0.012           | 0.230       | 5.14       | OK     |
| 17    | 0.098           | 0.230       | 42.84      | OK     |
| 18    | 0.026           | 0.230       | 11.49      | OK     |
| 19    | 0.072           | 0.230       | 31.44      | OK     |
| 20    | 0.008           | 0.230       | 3.52       | OK     |
| 21    | 0.034           | 0.230       | 14.86      | OK     |
| 22    | 0.015           | 0.230       | 6.35       | OK     |
| 23    | 0.016           | 0.230       | 7.16       | OK     |
| 24    | 0.010           | 0.230       | 4.41       | OK     |
| 25    | 0.025           | 0.230       | 10.70      | OK     |
| 26    | 0.015           | 0.230       | 6.42       | OK     |
| 27    | 0.036           | 0.230       | 15.63      | OK     |
| 28    | 0.005           | 0.230       | 2.03       | OK     |
| 29    | 0.047           | 0.230       | 20.68      | OK     |
| 30    | 0.013           | 0.230       | 5.51       | OK     |
| 31    | 0.044           | 0.230       | 19.10      | OK     |
| 32    | 0.009           | 0.230       | 3.93       | OK     |
| 33    | 0.039           | 0.230       | 17.20      | OK     |
| 34    | 0.006           | 0.230       | 2.55       | OK     |
| 35    | 0.026           | 0.230       | 11.38      | OK     |
| 36    | 0.009           | 0.230       | 4.05       | OK     |
| 37    | 0.021           | 0.230       | 9.04       | OK     |
| 38    | 0.004           | 0.230       | 1.73       | OK     |
| 39    | 0.008           | 0.230       | 3.28       | OK     |
| 40    | 0.007           | 0.230       | 3.24       | OK     |

## Flicker test graph

### Flicker Test Summary per EN/IEC61000-3-3 (Run time)

EUT: DVR BOARD\_GV2008  
 Test category: All parameters (European limits)  
 Test date: 2005-12-28  
 Test duration (min): 10  
 Comment: FLICKER  
 Customer: UDP


Tested by:  
 Test Margin: 100  
 Start time: 오후 2:53:25  
 End time: 오후 3:03:33  
 Data file name: F-000473.cts\_data

Test Result: Pass

Status: Test Completed

Pst. and limit line

European Limits

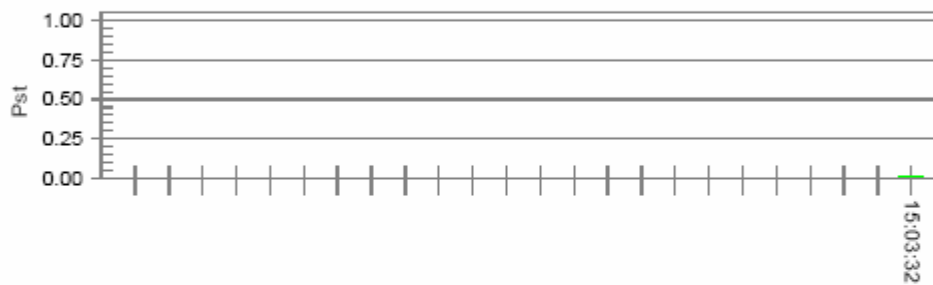

### Time is too short for Plt plot

Parameter values recorded during the test:

|                                 |        |                  |            |
|---------------------------------|--------|------------------|------------|
| Vrms at the end of test (Volt): | 229.45 |                  |            |
| Highest dt (%):                 | 0.13   | Test limit (%):  | 3.30 Pass  |
| Time(mS) > dt:                  | 0.0    | Test limit (mS): | 500.0 Pass |
| Highest dc (%):                 | 0.00   | Test limit (%):  | 3.30 Pass  |
| Highest dmax (%):               | 0.07   | Test limit (%):  | 4.00 Pass  |
| Highest Pst (10 min. period):   | 0.008  | Test limit:      | 1.000 Pass |
| Highest Plt (2 hr. period):     | 0.003  | Test limit:      | 0.650 Pass |