

GV-BX2400 Series 2MP H.264 WDR pro D/N Box IP Camera

GV-BX2400-0F / 1F / 2F



GV-BX2400-3V / 4V



- 2 megapixel progressive scan CMOS
- Stream 1 from H.264 and MJPEG;
Stream 2 from H.264, MPEG4 and MJPEG
- Up to 30 fps at 1920 x 1080
- Built-in / external microphone
- 2-way audio
- One sensor input and alarm output
- TV-out support
- Memory Card Slot
- Mini USB slot for WiFi Adapter (Optional)
- Wide Dynamic Range (WDR)
- Defog
- Motion detection
- Tampering alarm
- Privacy mask
- IP address filtering
- DC 12V / PoE
- Removable IR-cut filter for Day/Night function
- Varifocal megapixel lens
- Supports iPhone, iPad, Android & 3GPP
- 31 languages on Web interface

* No Memory card slot & local storage function for Argentina.

Active Tampering Alarm


Tampered



Focus Change



Camera Shift

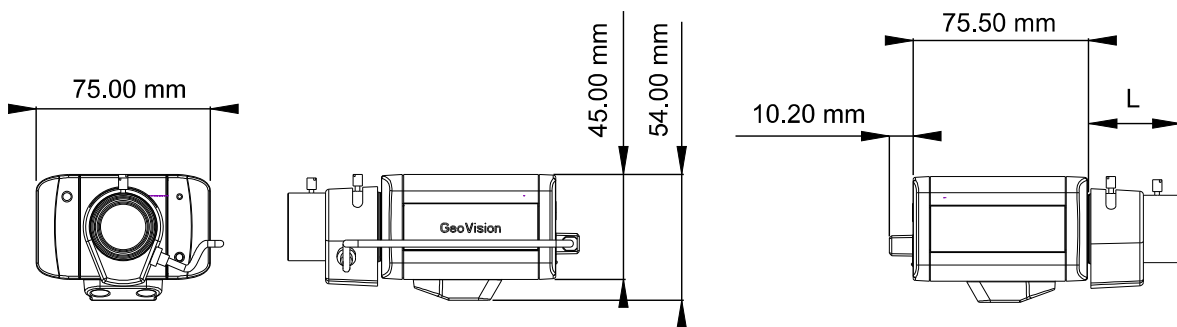

Model	L Length
BX2400-0F	15.7 mm
BX2400-1F	15.7 mm
BX2400-2F	15.7 mm
BX2400-3V	39.5 mm
BX2400-4V	37.1 mm

SPECIFICATIONS

Camera		GV-BX2400-0F	GV-BX2400-1F	GV-BX2400-2F	GV-BX2400-3V	GV-BX2400-4V
Image Sensor		1/3" progressive scan CMOS				
Picture Elements		1920 (H) x 1080 (V)				
Minimum Illumination	Color	0.08 Lux				
	B/W	0.05 Lux				
	IR ON	0 Lux				
Shutter Speed		Automatic, Manual (1/5 ~ 1/8000 sec)				
White Balance		Automatic, Manual (2800 ~ 8500K)				
Gain Control		Automatic				
S/N Ratio		47 dB				
BLC		Yes				
WDR Pro		Yes (with WDR sensor)				
Lens						
Megapixel		Yes				
Day/Night		Yes (with removable IR-cut filter)				
Lens Type		Fixed			Varifocal	
Focal Length		4 mm	8 mm	12 mm	2.8 ~ 12 mm	3 ~ 10.5 mm
Maximum Aperture		F/1.5	F/1.6		F/1.4	
Mount		CS Mount				
Image Format		1/3"	1/2.5"		1/3"	1/2.7"
Operation	Focus	Manual			Manual (w/lock)	
	Zoom	Fixed			Manual (w/lock)	
	Iris	Fixed			DC drive	
Torque (Focus/Zoom screws)		0.049 N.m				
Operation						
Video Compression		H.264, MPEG4 and MJPEG				
Video Streaming		Stream 1 from H.264 or MJPEG; Stream 2 from H.264, MPEG4 or MJPEG				
Frame Rate		30 fps at 1920 x 1080 * The frame rate and performance may vary depending on the number of connections and data bitrates (different scenes).				
Image Setting		Brightness, Contrast, Saturation, Sharpness, Gamma, White Balance, Flicker-less, Image Orientation, Shutter Speed, D/N Sensitivity, Backlight Compensation, WDR, Defog				
Audio Compression		G.711, AAC (24 kHz / 16 bit)				
Two-way Audio		Yes				
Sensor Input		1 input (Dry Contact)				
Alarm Output		1 Digital Output (200mA 5V DC)				
Video Resolution						
Main Stream	4:3	1600 x 1200, 1280 x 960, 640 x 480, 320 x 240				
	16:9	1920 x 1080, 1280 x 720, 640 x 360, 448 x 252				
	5:4	1280 x 1024, 640 x 512, 320 x 256				
Sub Stream	4:3	640 x 480, 320 x 240				
	16:9	640 x 360, 448 x 252				
	5:4	640 x 512, 320 x 256				
Network						
Interface		10/100 Ethernet				
Protocol		HTTP, HTTPS, TCP, UDP, SMTP, FTP, DHCP, NTP, UPnP, DynDNS, 3GPP/ISMA, RTSP, PSIA, SNMP, QoS (DSCP)				
Wireless LAN		IEEE 802.11 b/g/n				
Antenna Type		External				
Security		WEP, WPA-PSK(TKIP), WPA-PSK(AES), WPA2-PSK(TKIP), WPA2-PSK(AES)				
Mechanical						
Lens Mounting		CS-Mount				
Temperature Detector		Yes				
Connectors	Power	2-pin terminal block, PoE				
	Ethernet	RJ-45				
	Audio	1 In (Using the built-in microphone or externally connecting a microphone) 1 Out (Stereo phone jack, 3.5 mm / 0.14 in)				
	Digital I/O	3-pin terminal block, pitch 2.5 mm / 0.1 in				
	Auto Iris	Yes				
	Local Storage	Micro SD / SDHC / SDXC memory card slot (for Class 6 card or above)				
	TV-Out	BNC connector (640 x 480 resolution)				
Mini USB		Yes (for GV-WiFi Adapter)				

LED Indicator	2 LEDs: Power, Status
General	
Operating Temperature	0 °C ~ 50 °C / 32 °F ~ 122 °F
Humidity	10% to 90% (no condensation)
Power Source	12V DC / PoE
Max. Power Consumption	9.5W
Dimensions (L X W X H)	75.5 x75 x 54 mm / 2.97 x 2.95 x 2.13 in (without lens)
Weight	300 g / 0.66 lb
Regulatory	CE, FCC, C-Tick, RoHS compliant
Power over Ethernet	
PoE Standard	IEEE 802.3af Class 3 Power over Ethernet / PD
PoE Power Supply Type	End-Span
PoE Power Output	Per Port 48V DC, 350mA. Max. 15.4 watts
Web Interface	
Installation Management	Web-based configuration
Maintenance	Firmware upgrade through Web Browser or Utility
Access from Web Browser	Camera live view, video recording, change video quality, bandwidth control, image snapshot, digital I/O control, audio, Wide Angle Lens Dewarping, Picture in Picture, Picture and Picture, Privacy Mask, Visual Automation, Tampering Alarm, Text Overlay
Language	Arabic / Bulgarian / Czech / Danish / Dutch / English / Finnish / French / German / Greek / Hebrew / Hungarian / Indonesian / Italian /Japanese / Lithuanian / Norwegian / Persian / Polish / Portuguese / Romanian / Russian / Serbian / Simplified Chinese / Slovakian / Slovenian / Spanish / Swedish / Thai / Traditional Chinese / Turkish
Applications	
Network Storage	GV-NVR, GV-System, GV-Backup Center, GV-Recording Server
Smart Device Access	- GV-Eye for Android smartphone, tablet, iPhone, and iPod Touch - GV-Eye HD for iPad
Live Viewing	IE , GV-MultiView
CMS Server support	GV-Control Center, GV-Center V2, GV-VSM

- Note:**
1. The signal range and data throughput may vary depending on the network conditions and environmental factors.
 2. Specifications are subject to change without notice.